


**LINCOLN**



# 20 V PowerLuber series 1880 grease gun

High performance and technology in a  
rugged, work-ready package

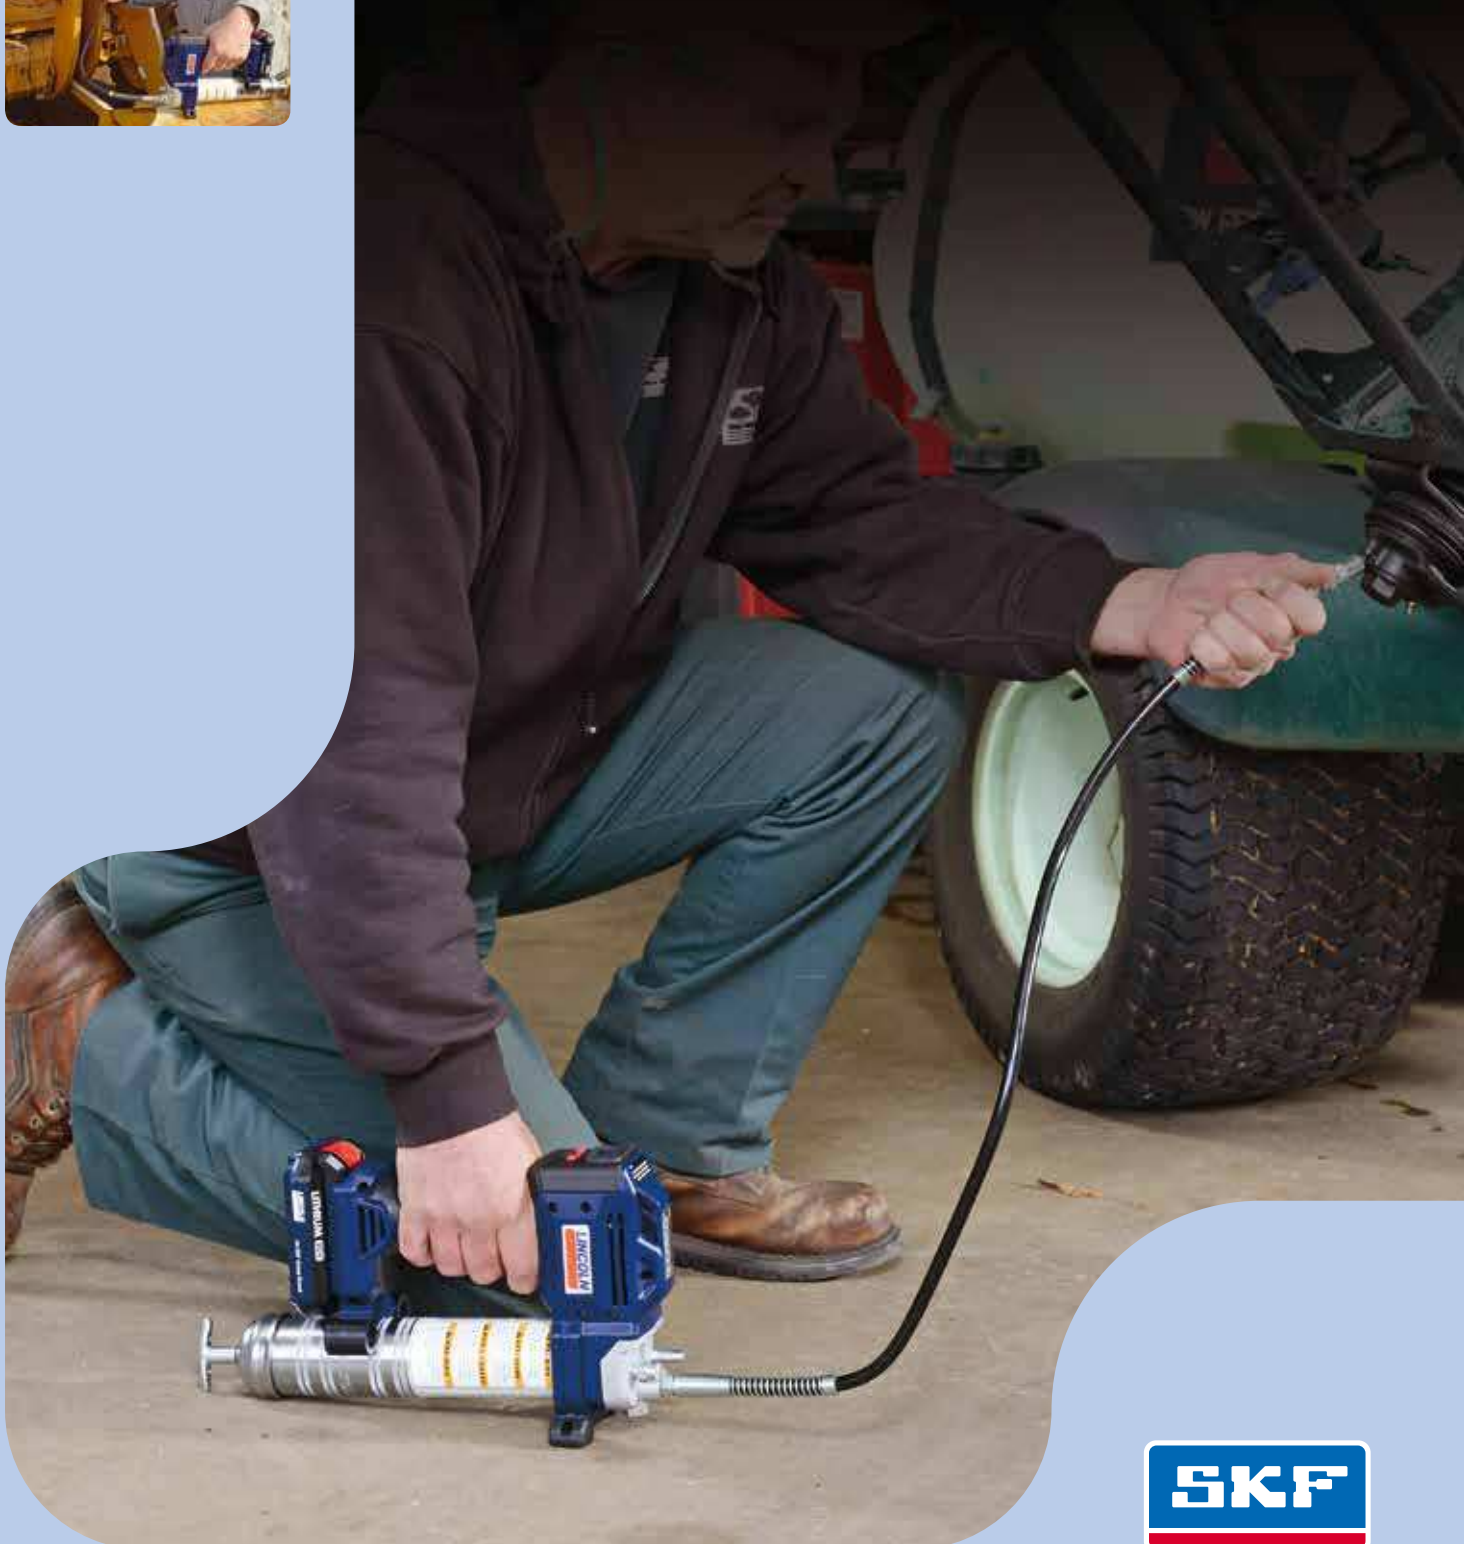

**SKF**

# Powerful, versatile technology from the lubrication experts

## High pressure and volume

The PowerLuber's redesigned, high-torque powerhead delivers grease at up to 10 000 psi (689,5 bar) in both high- and low-output settings. The new design reduces battery load and maximizes grease output per charge.

## Accuracy and precision

The tool's liquid crystal display (LCD) accurately indicates standard readings such as battery level and grease flow (grams or ounces). In addition, the LCD's flow meter detects the loss of prime, eliminating false readings to help ensure the equipment being serviced is properly lubricated.

## Work-ready design

The rugged PowerLuber's new three-point base keeps the tool upright and stable for easy handling without being bulky to allow easy access to fittings in tight spaces. Also, the tool has a convenient, built-in LED to illuminate the work area.



## 20 V PowerLuber models

<b>Model 1882</b>	Single battery unit with charger and carrying case
<b>Model 1884</b>	Dual battery unit with charger and carrying case
<b>Model 1870</b>	AC charger for 20 V Li Ion battery
<b>Model 1871</b>	20 V Li Ion battery

## Lincoln invented the cordless grease gun

For more than a century, professionals have chosen the Lincoln brand for their lubrication equipment needs. As the leader in lubrication technology and solutions, we are dedicated to listening to our customers and their requirements. That dedication, combined with our understanding of the challenges of their daily work, led to the development of the problem-solving PowerLuber.

Each generation of the PowerLuber family has delivered exceptional performance and dependability. The newest addition to the

line, the 20-volt\* PowerLuber series 1880, is no exception. This heavy-duty model has been engineered to complete the toughest jobs with power and consistency, while its innovative design minimizes operator fatigue.

\* Maximum initial voltage without workload



# PowerLuber 1880 series features

## PowerLuber 1880 series grease gun



**Work light**  
Built-in LED illuminates the work area

**Vent valve and filler nipple**  
The vent valve purges trapped air to help assure easy prime, and the filler nipple facilitates a quick, clean refill for those who prefer to bulk fill their barrel

**Three-point base**  
Base keeps the grease gun upright for easy handling and helps to keep the tool clean



**Integrated hose holder and tube guide**  
The holder's unique design allows for secure hose storage, and the tube guide provides easy threading of the grease barrel



**Flex hose**  
The 36 in. (91 cm) flex hose comes with anti-kink spring guards on each end and is the ideal size for most lubrication tasks



**Multi-function LCD**  
Display shows grease output and battery charge, and alerts the operator of blocked fittings and loss of prime

**Two-speed digital grease output selector**  
Switch from low-volume to high-volume dispensing with the touch of a button

**Lithium-ion battery**  
Lithium-ion technology is powerful and efficient, delivering an even flow of energy and eliminating the slowdown associated with NiCad, while offering three times the charge cycles

# The Brand the Pros Demand

Lincoln's PowerLuber family includes a full range of battery-operated grease guns, including NiCad and Lithium-ion-powered tools, as well as pneumatic and electric options. Developed by the lubrication experts, the PowerLuber line has the right grease gun for your needs.



**20 V Li Ion PowerLuber**  
Model 1882



**18 V Li Ion PowerLuber**  
Model 1862



**18 V NiCad PowerLuber**  
Model 1842



**12 V PowerLuber**  
Model 1242



**Pneumatic PowerLuber**  
Model 1162



**120 V AC PowerLuber**  
Model AC2440

Please contact:

**SKF USA, Inc.**

One Lincoln Way

St. Louis, MO 63120 USA

Tel. +1 (314) 679-4200

© SKF is a registered trademark of the SKF Group.

© Lincoln, PowerLuber and The Brand the Pros Demand are registered trademarks of Lincoln Industrial Corp.

© SKF Group 2014

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB LS/P2 14470 EN.US · February 2014 · Form 444590

